

AVR/8051 USB PROGRAMMER

USER MANUAL

FOR WINDOWS 8.1 OS

For more Information Visit us at www.JustExecuteIt.com




LIST OF CONTENTS

| | | |
|---|--|----|
| 1 | Package Content..... | 3 |
| 2 | Introduction..... | 4 |
| 3 | Important safety warning and handling procedures..... | 5 |
| 4 | Getting Started with Windows 8.1..... | 6 |
| | i. Connecting Programmer..... | 6 |
| | ii. Installing Drivers..... | 6 |
| 5 | Programming Microcontroller..... | 13 |
| 6 | Copyright Notice..... | 20 |
| 7 | Disclaimer..... | 20 |
| 8 | Trademark..... | 20 |

1. PACKAGE CONTENTS

- a. AVR/8051 USB PROGRAMMER
- b. A USB cable of type B-to-A, for connecting Programmer to a PC
- c. 10-Pin FRC cable
- d. CD with Software guide to AVR/8051 Programmer with 20-20 AVR/8051 Projects Tutorials

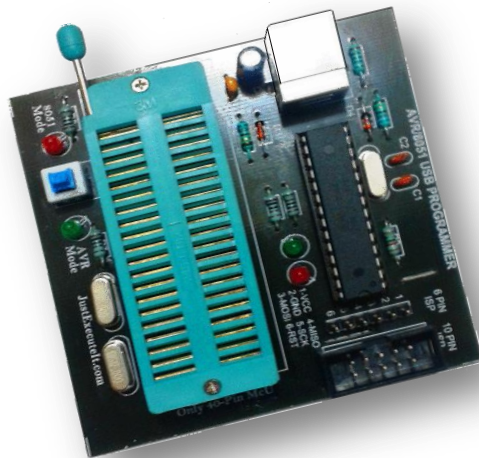

(a). AVR/8051 USB ZIF PROGRAMMER



(b). A USB cable of type B-to-A, for connecting Programmer to a PC



(c).10-Pin FRC cable



(d). CD with Software guide to AVR/8051 Programmer with 20-20 AVR/8051 Projects Tutorials



2. INTRODUCTION

Microcontroller programming has been made simpler than ever before. AVR/8051 PROGRAMMER is very powerful yet Low cost and comfortable tool for any developer. Programmer gives the user a friendly environment with USB communication and easy GUI.

Features:

- ✓ Supports Windows Xp , Windows 7, Windows 8 , Windows Vista OS
- ✓ USB powered, No external supply is required.
- ✓ On Board 10-Pin FRC Socket, designed to connect Programmer to target development boards
- ✓ On Board 6-Pin Burg Strip, designed to connect programmer to Bread boards.
- ✓ 40 Pin ZIF Socket for programming only 40-Pin 8051/AVR Microcontrollers
- ✓ Enabled with SCK option to support targets with low clock speed (< 1,5MHz).
- ✓ supports wide range of AVR and 8051 microcontrollers such as:

| | | | | |
|---|--|--|--|---|
| ATmega128, ATmega1280, ATmega1281, ATmega1284P, ATmega128A, ATmega16, ATmega162, ATmega164P, ATmega165, ATmega165P ATmega168, ATmega168P, ATmega169, ATmega169P, ATmega32, ATmega324P, ATmega324PA, ATmega325, ATmega3250, ATmega3250P, ATmega325P, ATmega328P, ATmega329, ATmega3290, | ATmega3290P, ATmega329P, ATmega32A, ATmega32HVB, ATmega32M1, ATmega32U4, ATmega32U6, ATmega48, ATmega48P, ATmega64, ATmega640, ATmega644, ATmega644P, ATmega645, ATmega6450, ATmega649, ATmega6490, ATmega64A, ATmega8, ATmega8515, ATmega8535, ATmega88, ATmega88P, ATmega88PA, ATmega8A. | ATtiny12, ATtiny13, ATtiny13A, ATtiny15, ATtiny167, ATtiny22, ATtiny2313, ATtiny24, ATtiny25, ATtiny26, ATtiny261, ATtiny434, ATtiny44, ATtiny45, ATtiny461, ATtiny48, ATtiny84, ATtiny85, ATtiny861, ATtiny88. | AT90CAN128, AT90CAN32, AT90CAN64. AT90PWM2, AT90PWM2B, AT90PWM3, AT90PWM3B, AT90PWM81, AT90PWM216, AT90PWM2B, AT90PWM316. AT90USB1286, AT90USB1287, AT90USB162, AT90USB646, AT90USB647, AT90USB82. | AT90S1200, AT90S2313, AT90S2323, AT90S2343, AT90S4414, AT90S4433, AT90S4434, AT90S8515, AT90S8535, AT90SCR100H AT89S51, AT89S52, AT89S53, AT86RF401, AT89S2051 AT89S4051, AT89S8252, AT89S8253, |
|---|--|--|--|---|



3. IMPORTANT SAFETY WARNING AND HANDLING PROCEDURES

The AVR/8051 USB programmer is not intended for small children! Younger users should use this product only under adult supervision. By using this product, you agree not to hold “JustExecuteIt.com” liable for any injury or damage related to the use or to the performance of this product. This product is not designed for, and should not be used in, applications where the malfunction of the product could cause injury or damage. Please take note of this additional precaution:


Since the PCB and its components are exposed, take standard precautions to protect your programmer from ESD (electrostatic discharge), such as first touching the surface the programmer is resting on before picking it up. When handing the programmer to another person, first touch their hand with your hand to equalize any charge imbalance between you so that you don’t discharge through the programmer as the exchange is made.



4. GETTING STARTED WITH WINDOWS 8

i. Connecting Programmer

Plug one end of the USB cable into the USB connector on AVR/8051 USB PROG. Plug the other end into a USB port on your PC/Laptop as shown in the figure below.

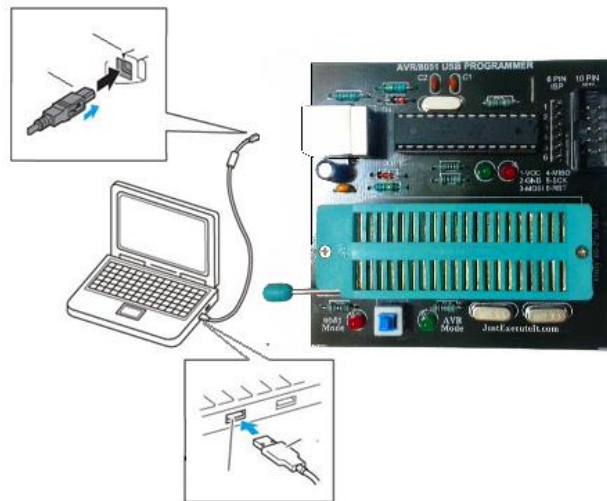


ii. Installing Drivers

1) Move the cursor over the top or bottom right corner or the screen and it will show extra options on the right side of the screen. Choose the **Settings** option (icon looks like a Gear).






2) After this chose '**Change PC Settings**'

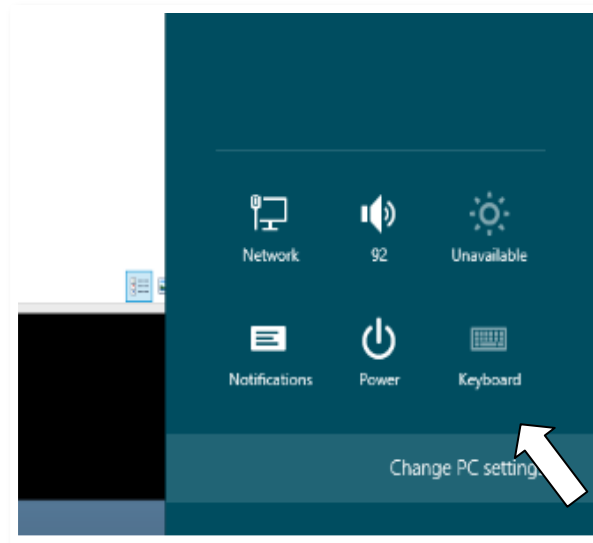


3) Choose '**Recovery**' in the left menu and click on the '**Restart Now**' which is present under '**Advance Startup**' Options at the bottom right side.

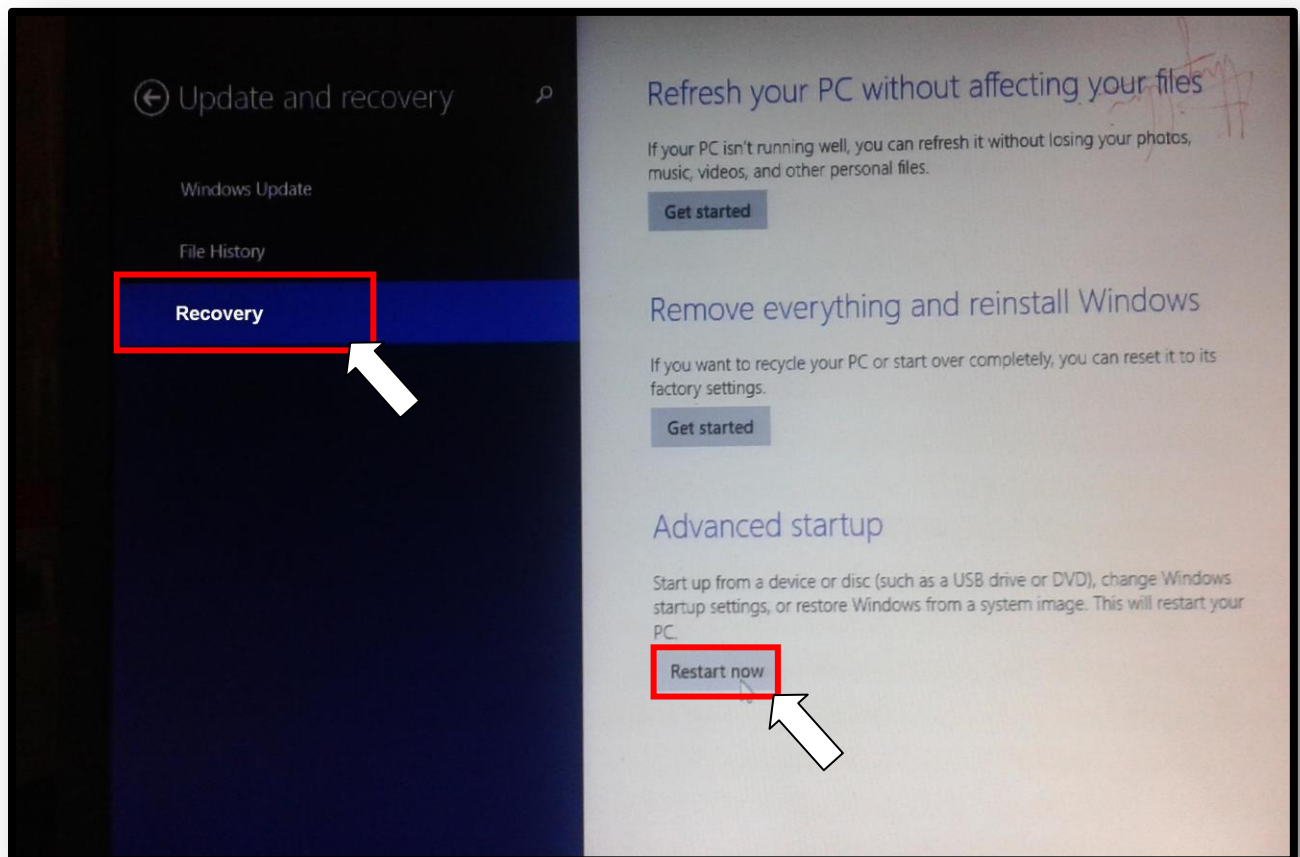




4) Choose '**Troubleshoot**' Option

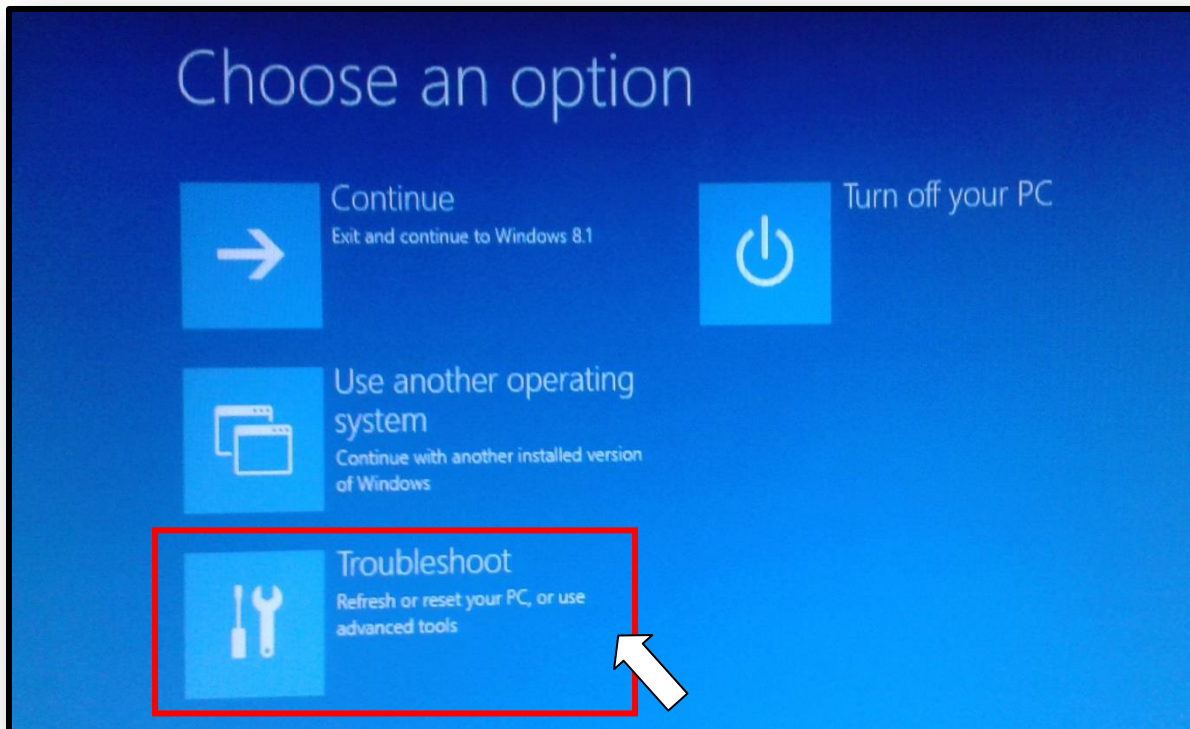


5) Click on '**Advance Option**'

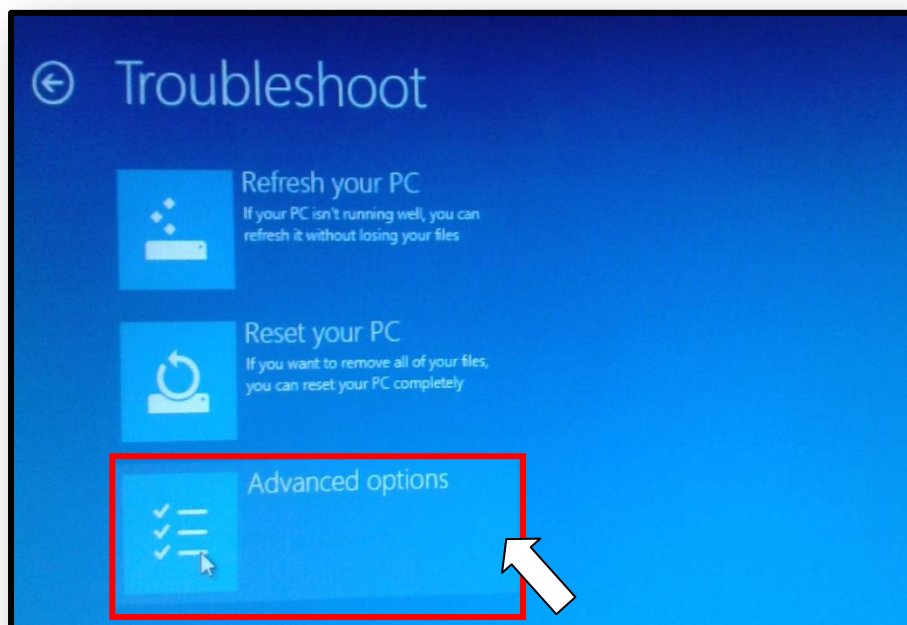




6) Select '**Startup Settings**'

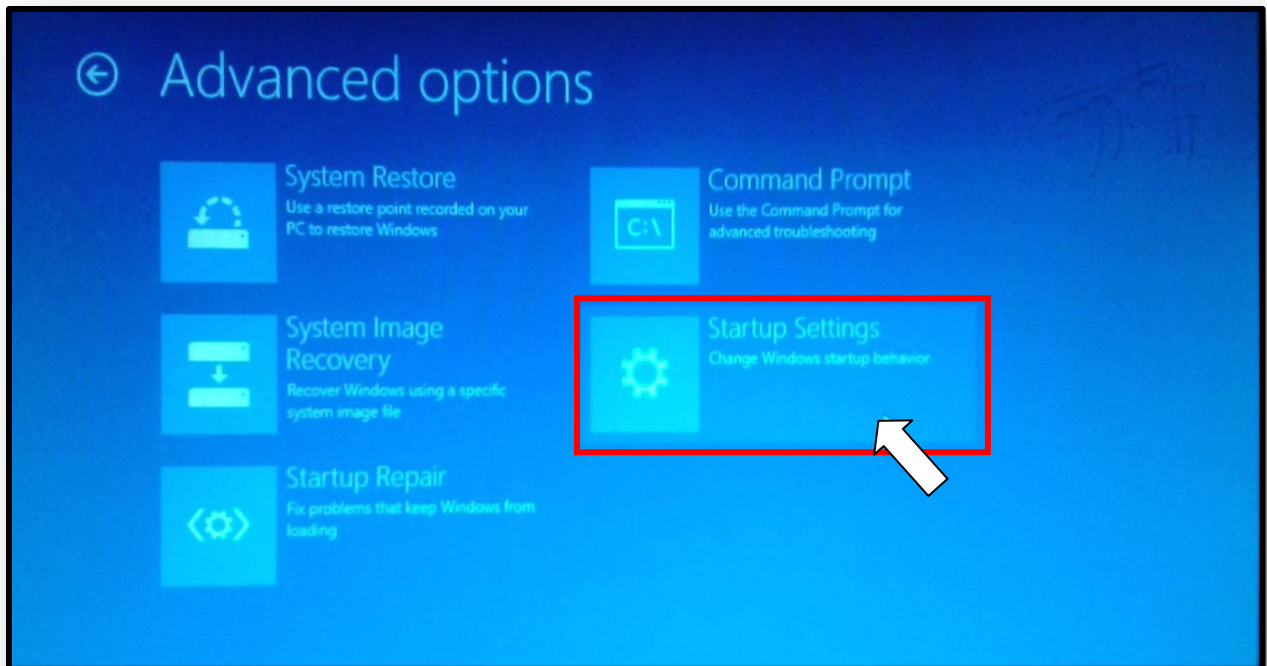


7) Click on **Restart** Button

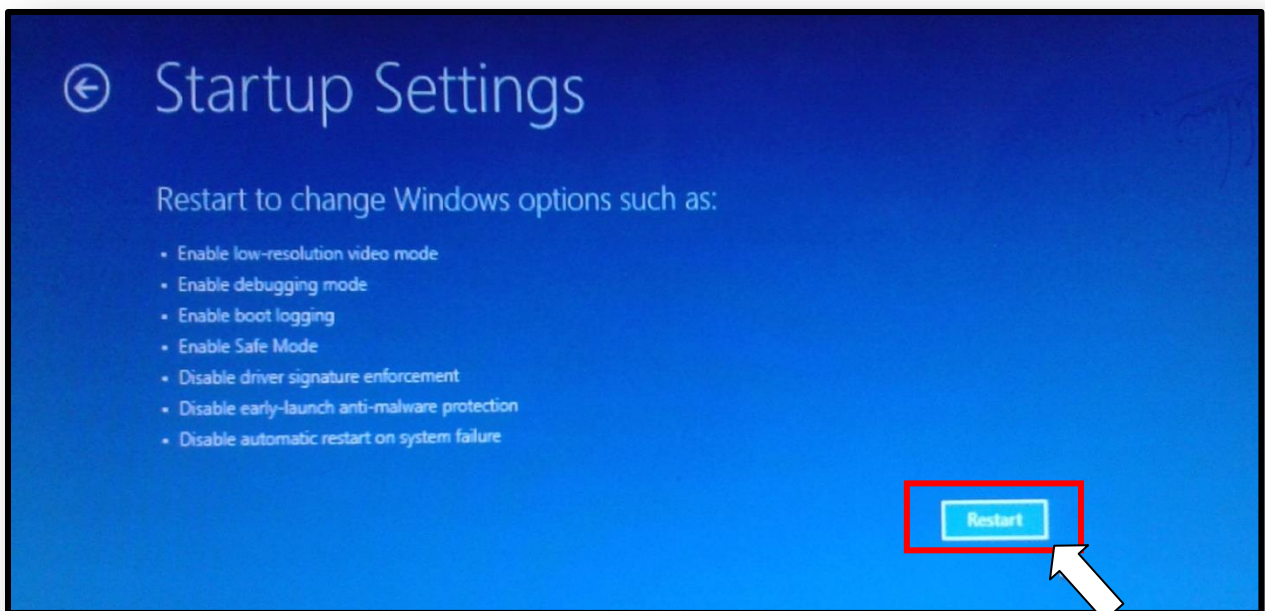




8) Press '**F7**' from the Keyboard, and wait until system Opens

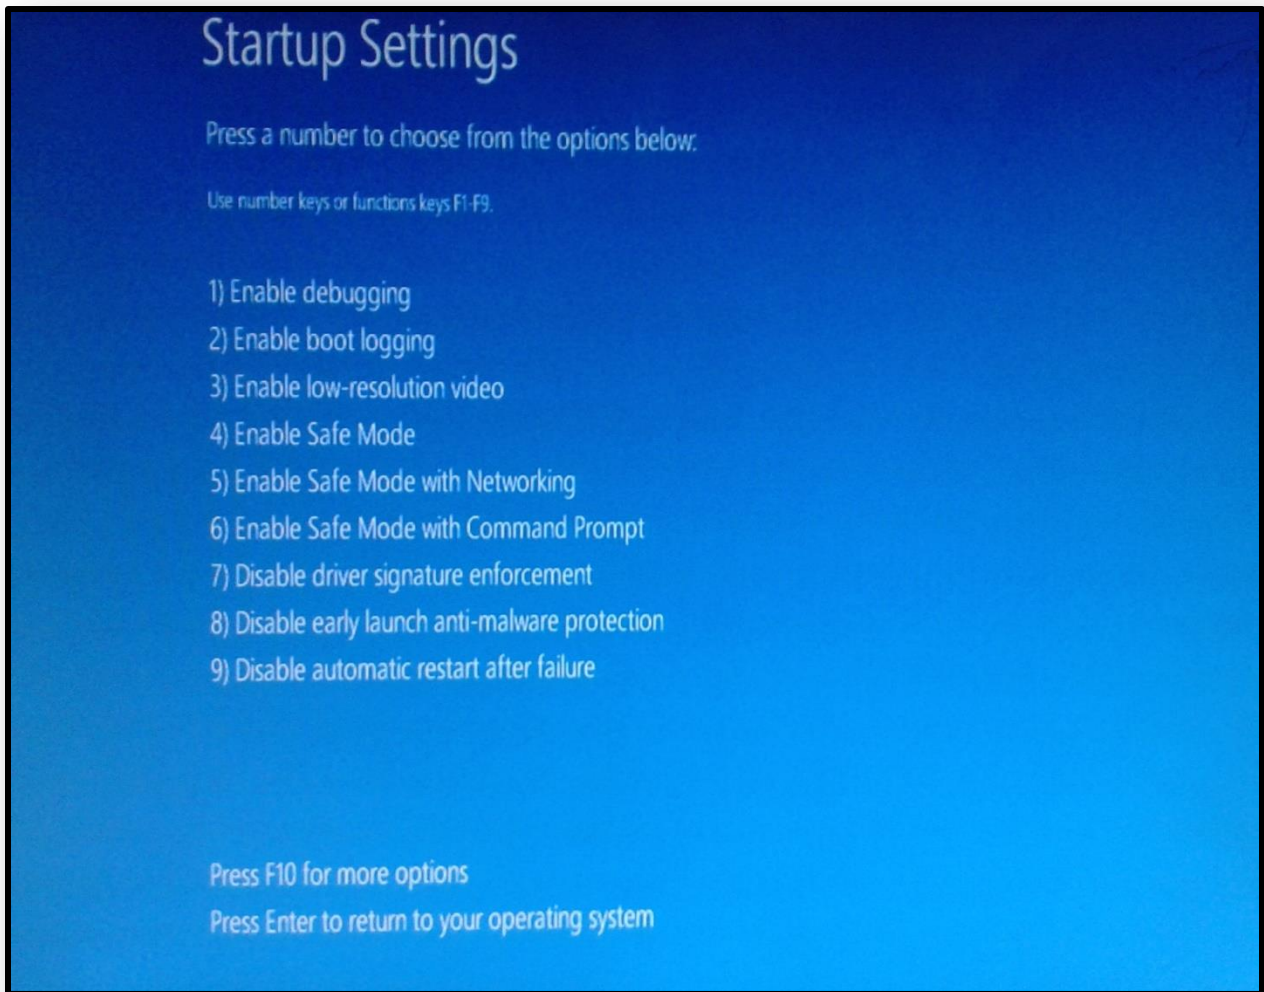


9) Now connect your USBasp programmer to the USB port of your PC/laptop. Ignore the message that 'Device driver software was not successfully installed'.

10) Take USBasp drivers from CD . Go to **Device Manager** in control Panel and you will find 'LibUSB-Win32 Devices'. Click on it and select '**Update Driver Software...**'

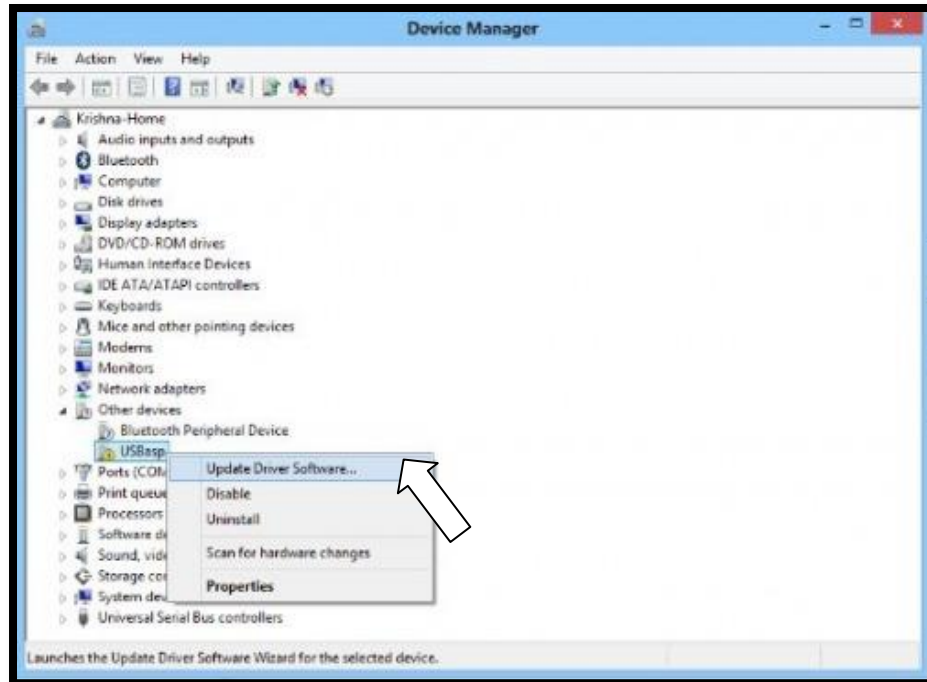


11) Select 'Browse my computer for driver software'. After this browse to the location where you have extracted the USBasp drivers

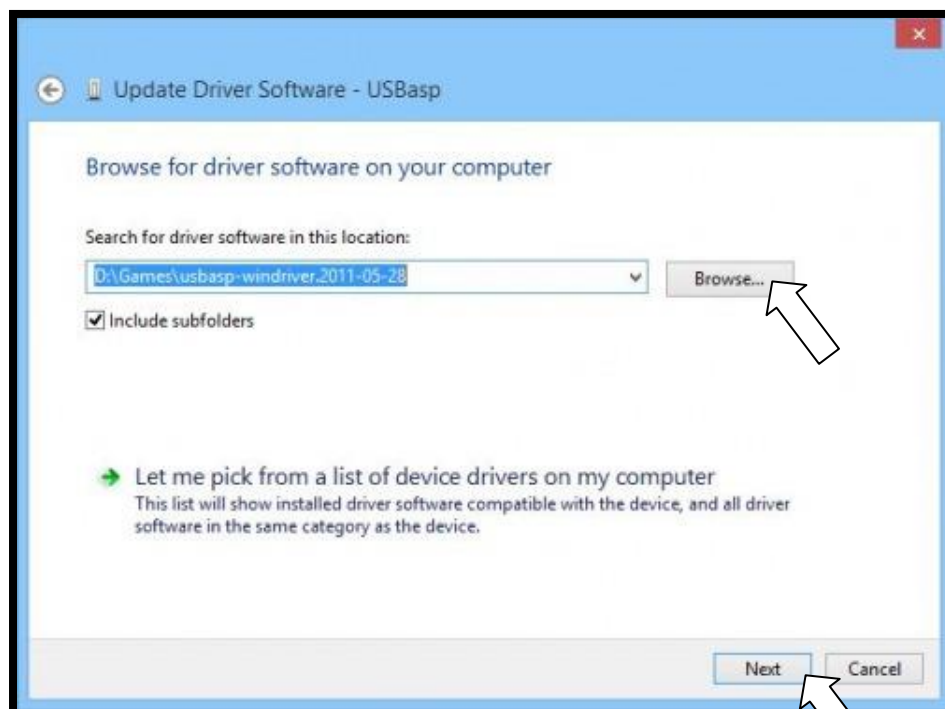

12) Click next and ignore the security warning 'Windows can't verify the publisher of this driver software' and select 'Install this driver software anyway'




13)Woot! if everything goes alright you will see something like this -

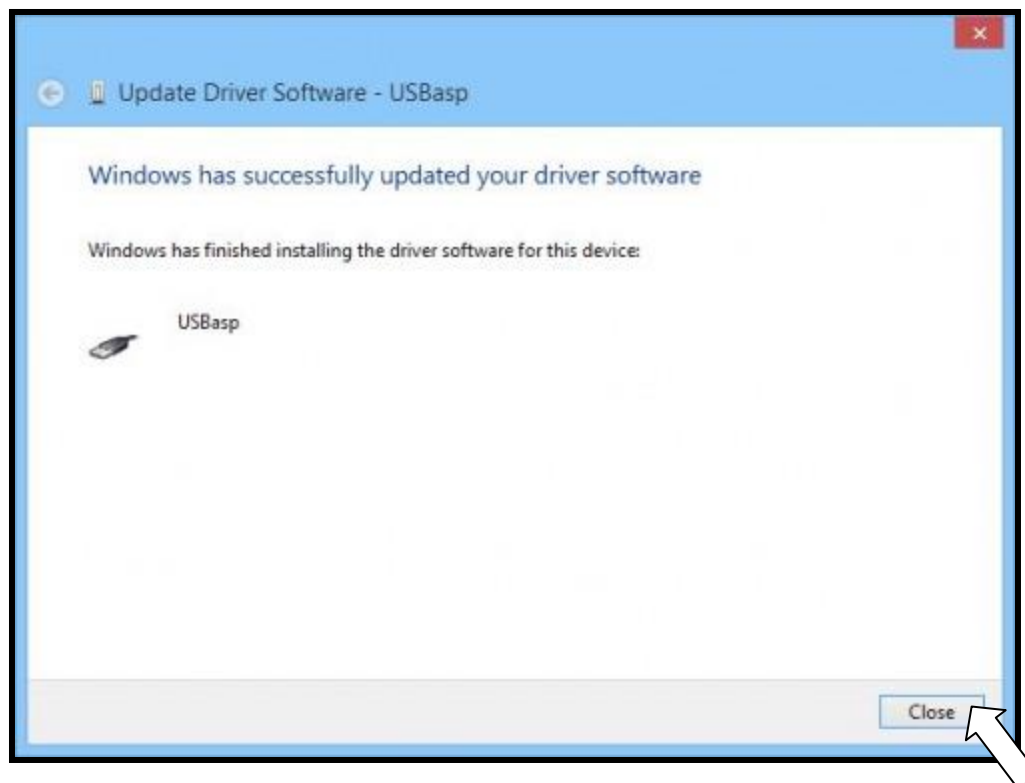


5. PROGRAMMING MICROCONTROLLER

Till now we have successfully completed the driver's installation for Windows XP Operating system .Next we will see how to **dump a '.HEX' file into Microcontrollers**. As shown in the picture below there are 3 ways by which a .HEX file can be dumped into microcontroller depending upon the project you are working on.


- By Using 40-Pin ZIF Socket
- By using 6-Pin Burg strip
- By using 10-pin FRC Connector

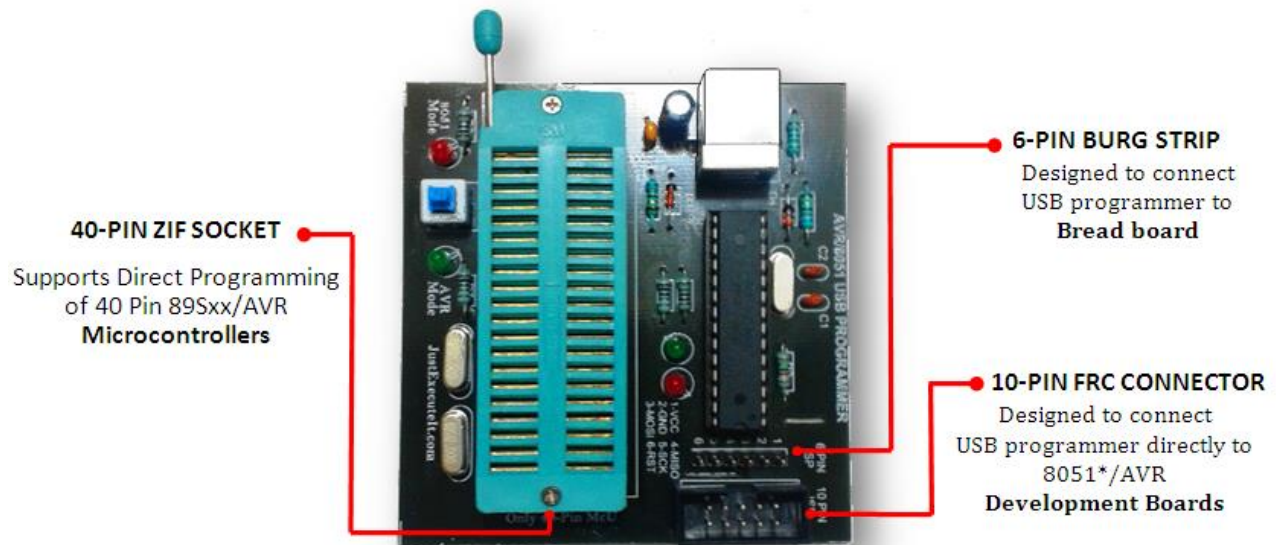

- By using 40-Pin ZIF Socket:** It supports only 40 Pin 89Sxx/AVR Microcontrollers. The desired mode of programming can be selected using a switch provided. As a default the ZIF connector stays at 8051(89SXX) Mode (Glowing **RED** LED ON),On pressing switch ZIF connector shifts to AVR Mode(Glowing **GREEN** LED ON)

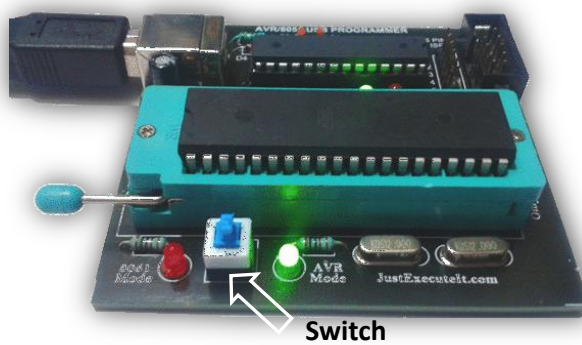


ZIF Connector is in AVR Mode

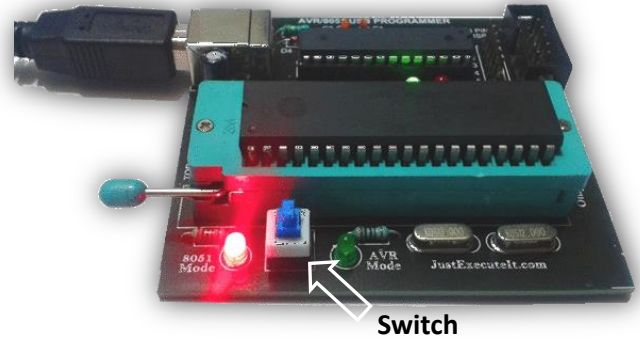


ZIF Connector is in 8051 Mode




- b. **USING 6-PIN BURG STRIP:** This can be used while working at **Bread Board** .By using a simple 6 Pin Female **Relimate** connector cable, programmer can be interfaced to Bread Board .Make sure that following pin interfacing is made before installation .Such as MOSI, MISO, SCK, RST, VCC, GND Pins of **AVR/8051USB PROGRAMMER** intersects exactly with MOSI, MISO, SCK, RST, VCC, GND Pins of **TARGET DEVELOPMENT BOARD**. Crystal Oscillator =12Mhz(Mostly)

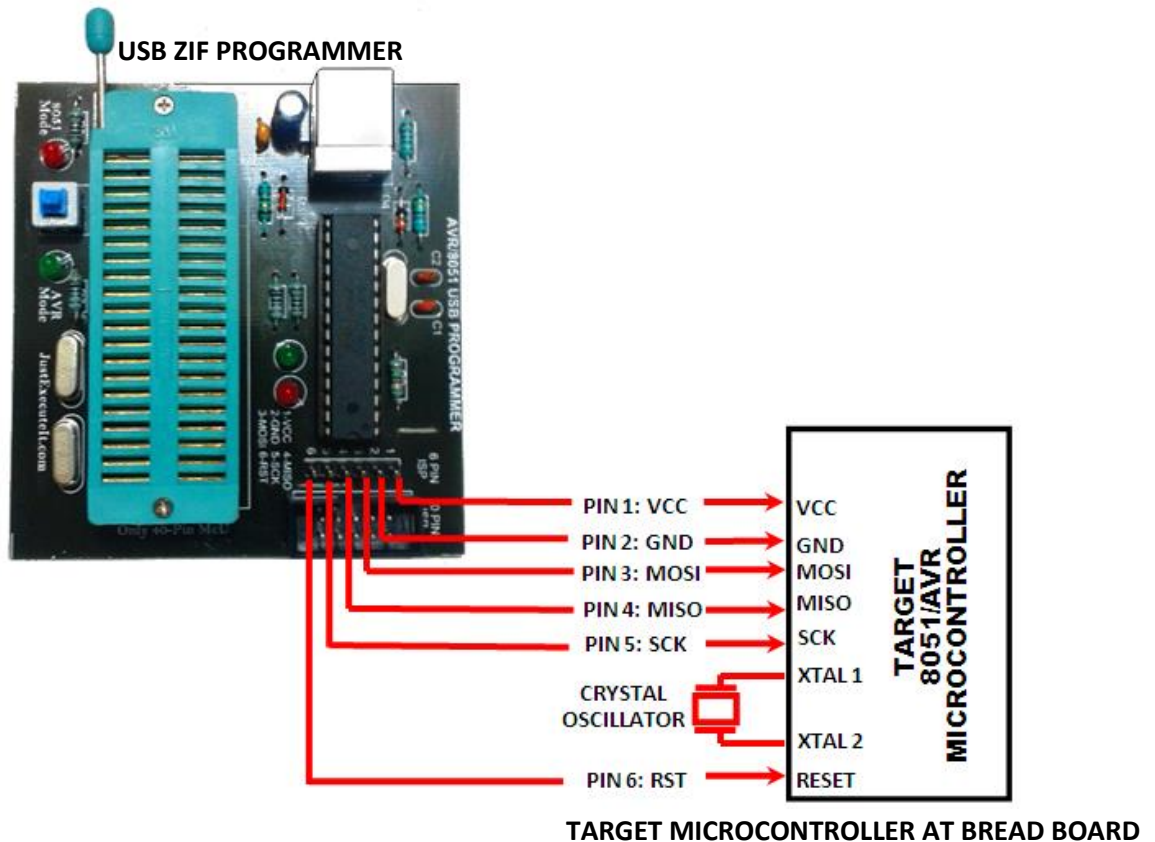

- c. **USING 10-PIN FRC CONNECTOR**

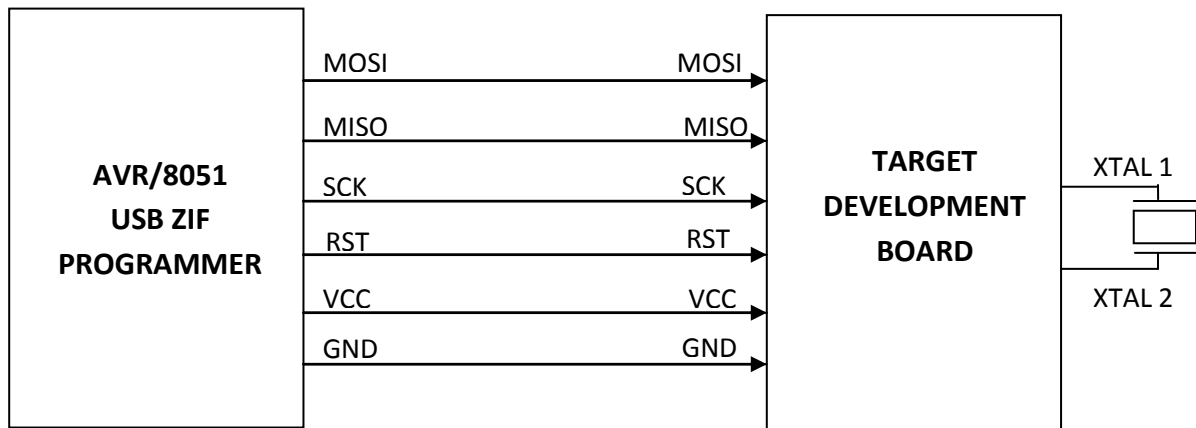


Detailed pin configuration for **AVR/8051 USB PROGRAMMER** is as follows

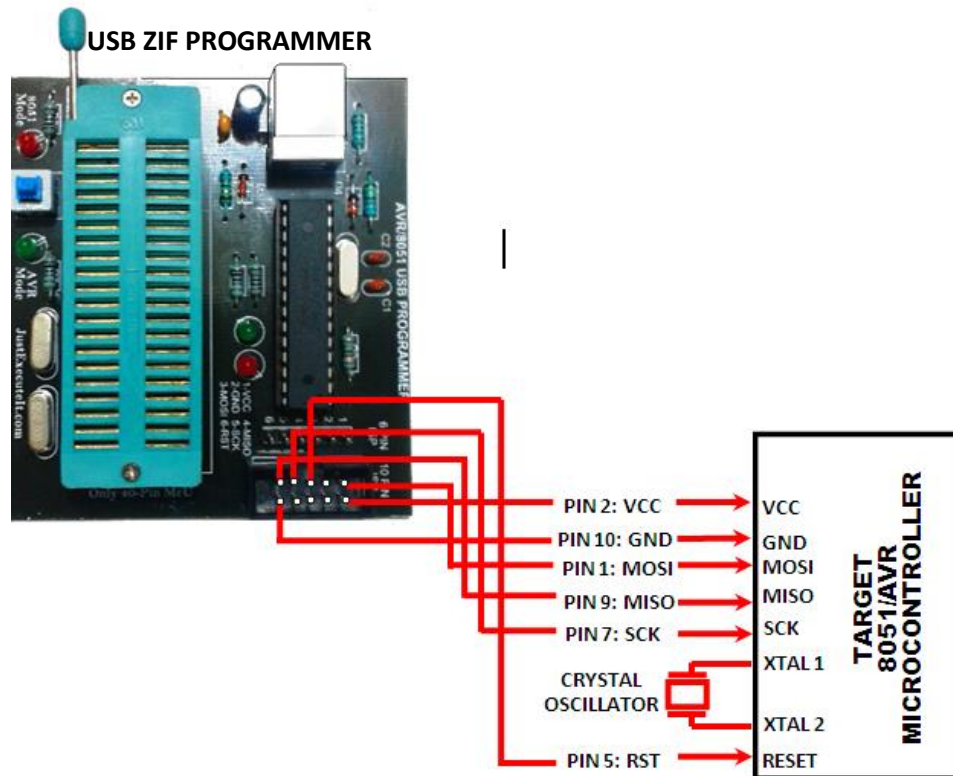

TARGET MICROCONTROLLER AT DEVELOPMENT BOARD


NOTE: While Using 8051 Development board, Please remove capacitor 10uf from reset circuit as reset Pin is used for programming.

Step 1: Go to **Progisp AVR/8051 Programmer** Folder Present in CD and open **Progisp**

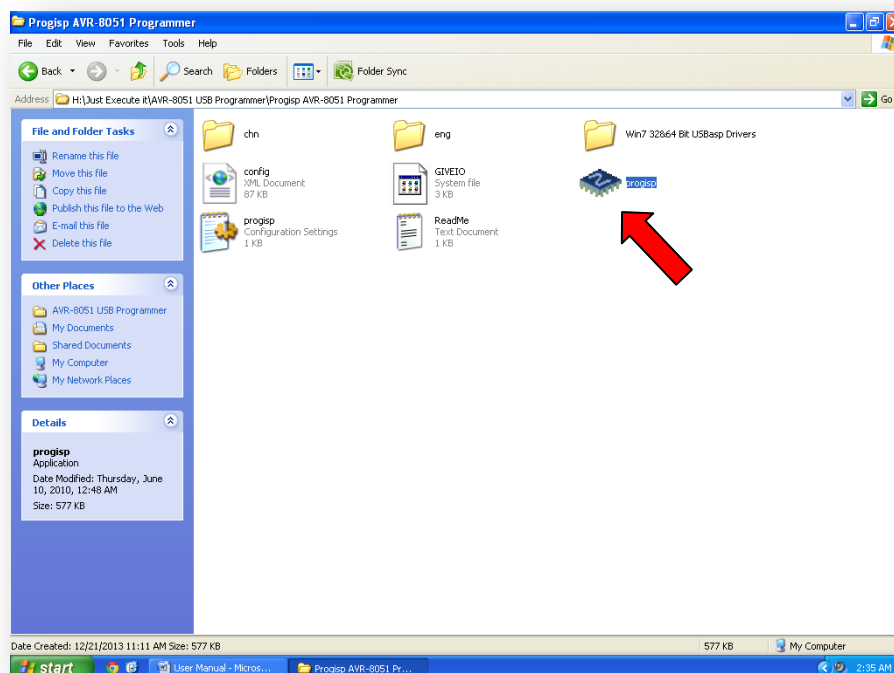




Step 2: Select the Micro controller

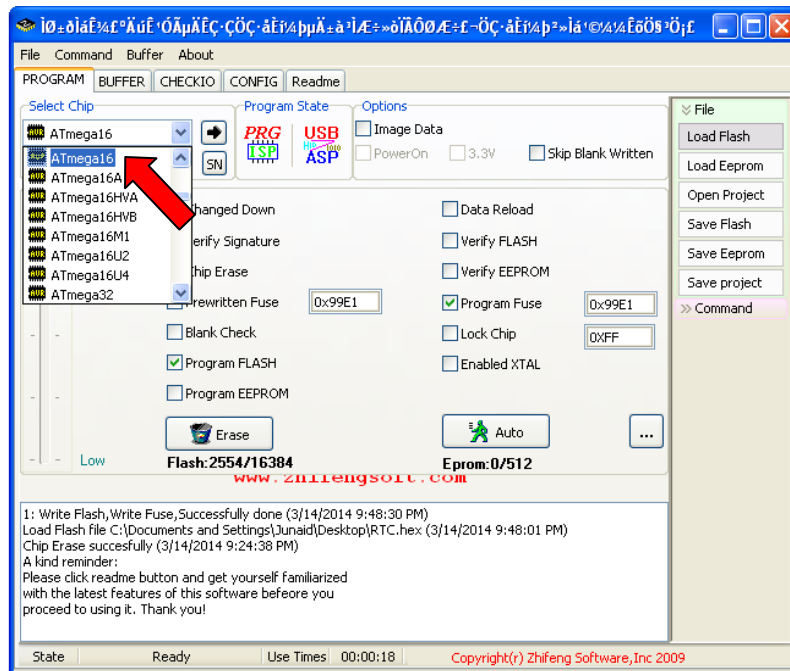


Step 3: Click on Load Flash to locate the .HEX File

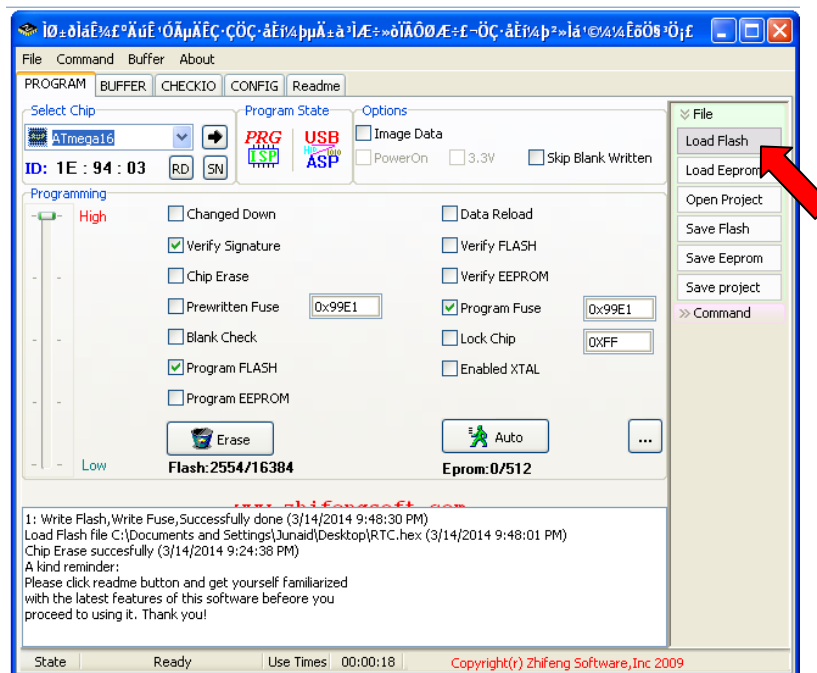




Step 4: Locating **Sample.HEX** file then click **Open**

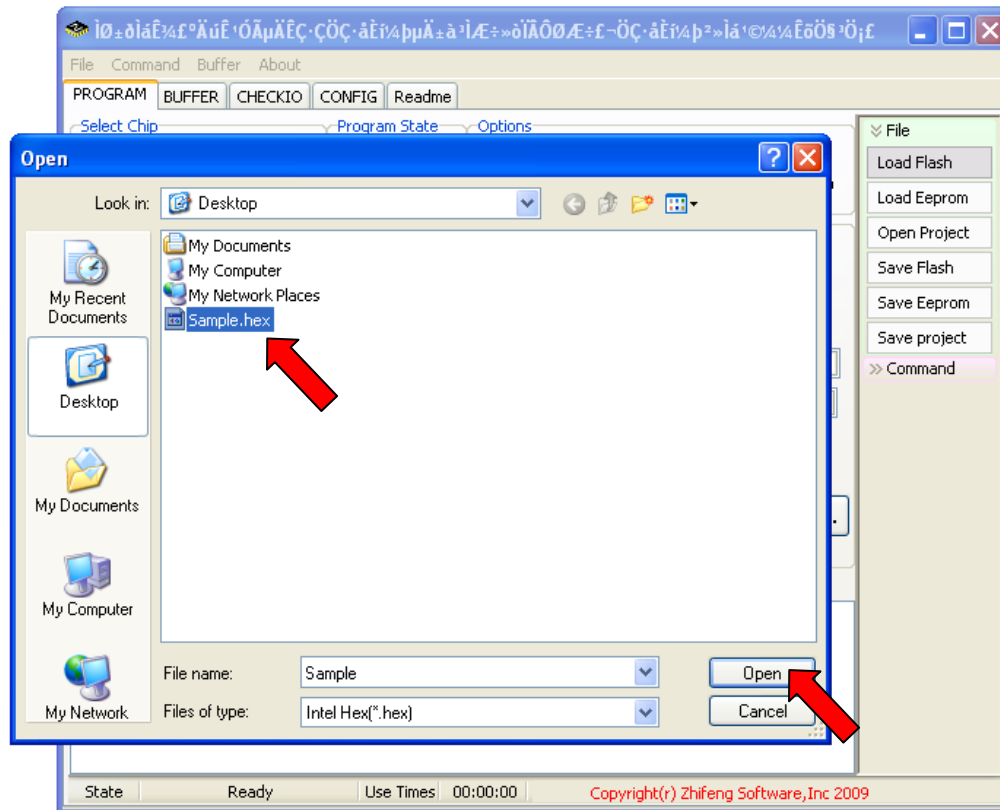


Step 5: Click **Erase**

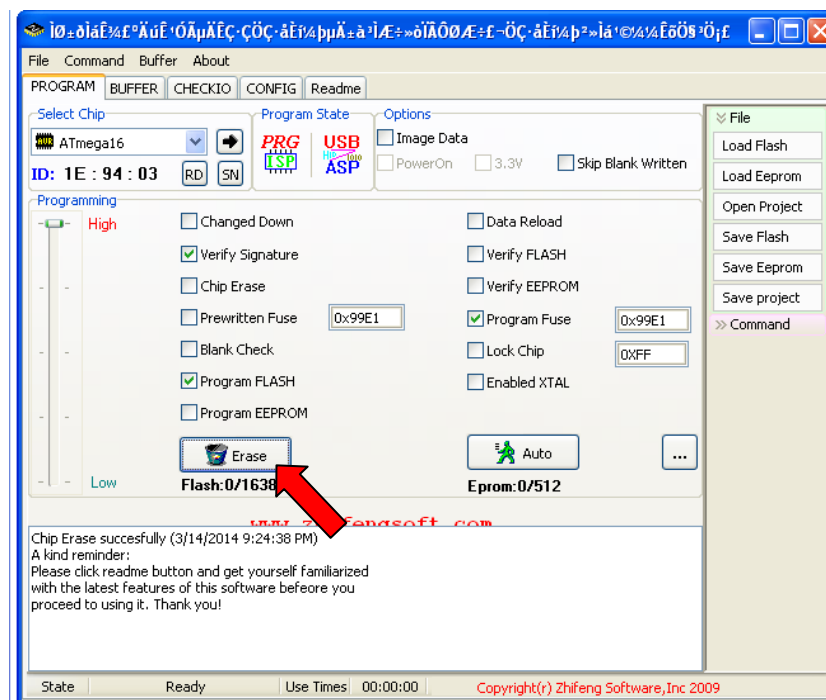




Step 6: Mark **1. Verify Signature 2. Program FLASH 3. Program Fuse** for **QUICK PROGRAMMING** and then Click **Auto**

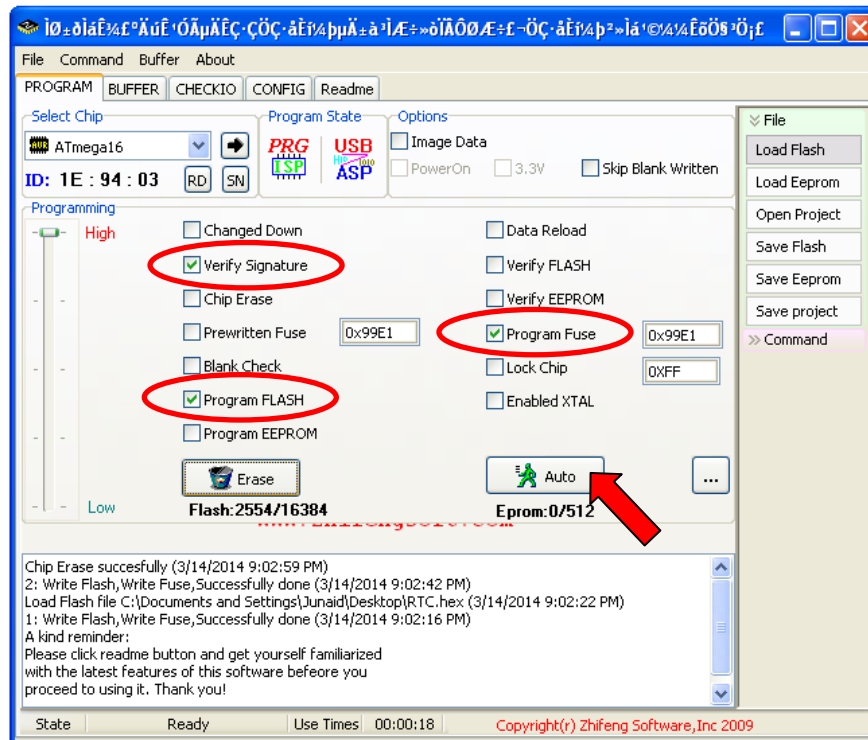


Step 7: Wait few seconds while it's processing.

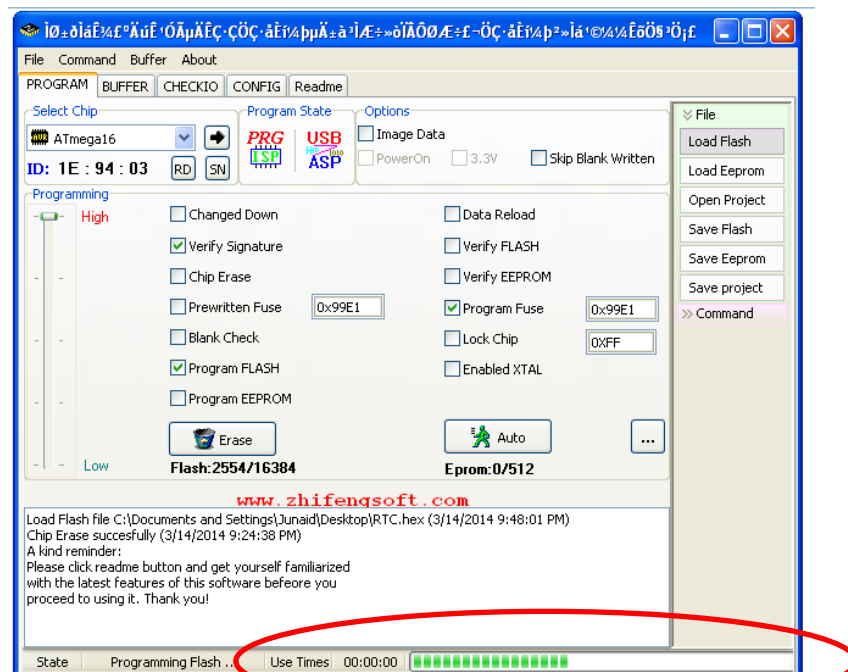

For more Information Visit us at www.JustExecuteIt.com



Step8: Now you can proceed to use your Microcontroller for your Application .**Thank you**

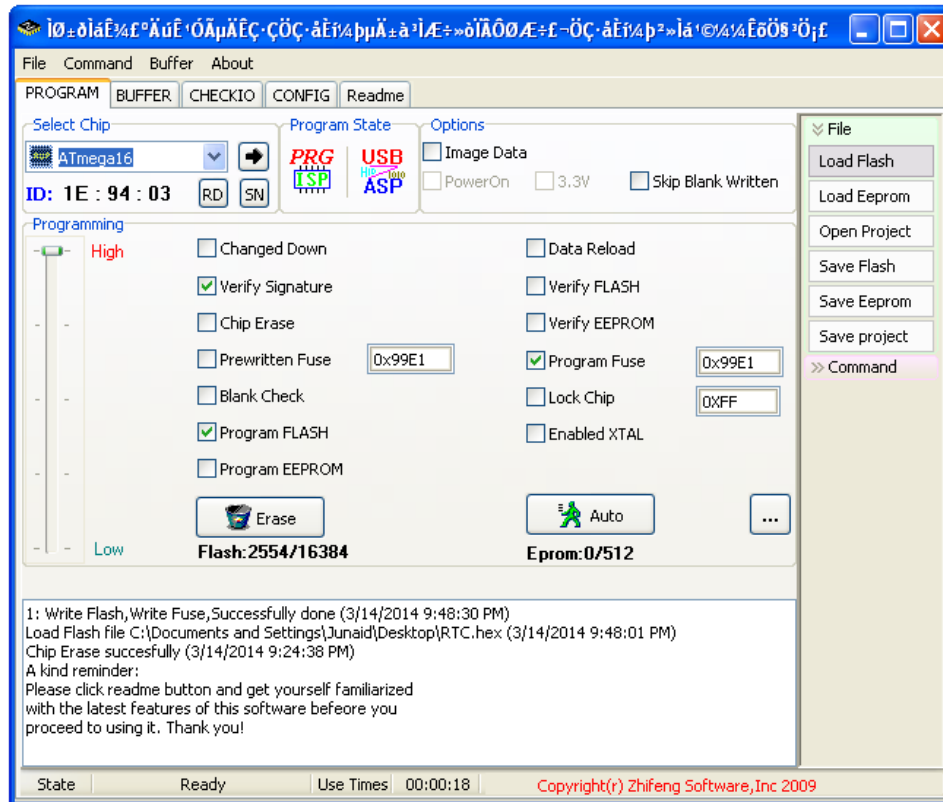



6. COPYRIGHT NOTICE

The contents in this document can be shared and used for educational purpose, only with a prior permission from JEI Inc.

7. DISCLAIMER

Reasonable care has been taken to prepare this document, but no guarantee is given to correctness of its content. Our products are under continual improvement and we reserve the rights to make changes without any notice.

8. TRADEMARK

All trademarks are properties of their respective owners.

